



Bow Roller

top view

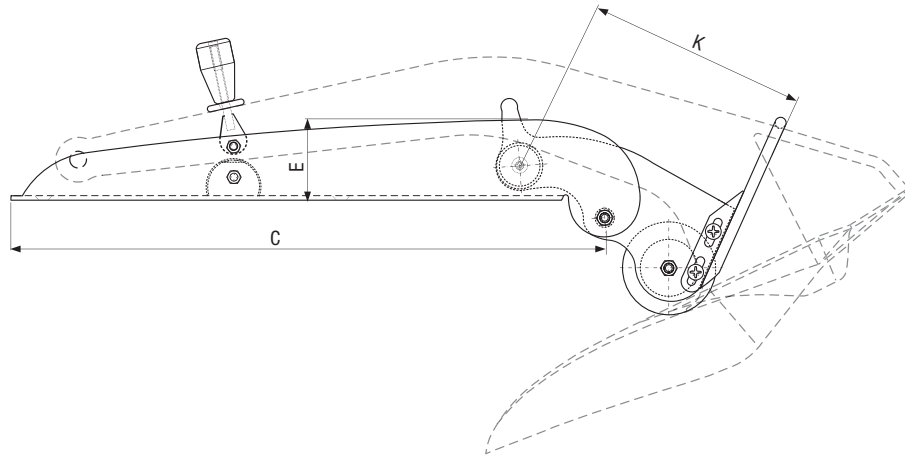

side view

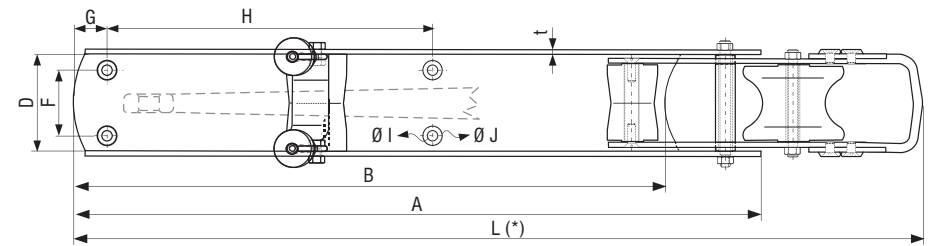

ANCHOR Kg	5	8	12	16	21	27	35	45	60	80	100	130	160	200
A	396.8	464.0	531.2	584.6	639.8	696.0	759.1	825.0	908.0	994.4	1076.9	1175.0	1259.3	1356.7
B	342.1	400.2	458.2	504.2	551.8	600.3	654.7	711.6	738.2	862.0	938.9	1013.7	1086.1	1170.2
C	374.5	438.0	501.5	551.9	604.0	657.0	716.7	778.7	857.2	943.4	1016.6	1109.5	1188.7	1280.7
D	55.2	64.6	74.0	81.4	89.1	96.9	105.7	114.9	126.4	139.1	149.9	163.6	175.3	188.9
E	50.5	59.1	67.7	74.5	81.5	88.7	96.7	105.1	115.7	127.3	137.2	149.7	160.4	172.8
K	141.1	165.0	188.9	207.9	227.5	247.5	269.9	293.4	322.9	355.4	383.0	417.9	447.8	482.5
L (*)	536	573	656	721	790	859	937	1018	1121	1234	1329	1450	1555	1675
t	3.0	4.0	4.0	4.0	5.0	5.0	6.0	6.0	6.0	8.0	8.0	8.0	10.0	10.0

Dimensions are in mm. If dimension “A” or “B” is given together with the order by the costumer, it can be manufactured in different lengths. The bow roller chassis is either manufactured without holes to avoid potential mounting problems and the holes are drilled by the customer, or it is manufactured with holes, if the dimensions of “F, G, H, I, J” are given together with the order by the customer. Dimensions and details may change without notice.