

SPECIFICATIONS OF **GP-39**

|                        |   |
|------------------------|---|
| PRODUCT NAME           | GPS Navigator   |
| DISPLAY                |   |
| Screen Size            | 4.2" color LCD  |
| Effective Display Area | 92 (W) x 52 (H) mm  |
| Pixel Number           | 480 (V) x 272 (H) pixels  |
| Display Mode           | Plotter, Highway, Steering, NAV Data, Satellite monitor, User Display (Digital, Speedometer, COG) |
| Memory Capacity        | 3,000 ship's track points<br>10,000 waypoints with comments<br>100 routes with 30 waypoints/route |
| Alarm                  | Arrival and Anchor watch, Cross track error, Speed, WAAS (SBAS), Time, Trip                       |

GPS/SBAS (WAAS/EGNOS/MSAS)

|                   |  |
|-------------------|--|
| Receiver Type     | GPS: 12 channels parallel, 12 satellites tracking, C/A code, all-in-view<br>SBAS: 2 channels |
| Receive Frequency | L1 (1575.42 MHz ± 1.023 MHz)   |
| Time to First Fix | Cold start: 90 seconds approx.   |
| Tracking Velocity | 1,000 kn   |

|          |   |
|----------|---|
| ACCURACY | GPS: 10 m (95% of the time, HDOP≤4)<br>WAAS: 3 m (95% of the time, HDOP≤4)<br>MSAS: 7 m (95% of the time, HDOP≤4) |
|----------|---|

INTERFACE

|        |   |
|--------|---|
| Ports  | NMEA0183: 1 port    USB: 1 port   |
| Output | AAM, APB, BOD, BWC, BWR, DTM, GGA, GLL, GSA, GSV, RMB, RMC, VTG, XTE, ZDA |
| Input  | RTE, TLL  |

|              |                       |
|--------------|-----------------------|
| POWER SUPPLY | 12-24 VDC : 0.7-0.3 A |
|--------------|-----------------------|



ENVIRONMENT

|                   |  |
|-------------------|--|
| Temperature       | Display unit: -15°C to +55°C<br>Antenna unit: -25°C to +70°C |
| Relative humidity | 93% or less at +40°C   |
| Waterproofing     | Display unit: IP55<br>Antenna unit: IP56                     |


EQUIPMENT LIST

- Standard**
1. Display unit GP-39 ..... 1 unit
  2. Antenna unit GPA-017 with cable 10 m ..... 1 unit
  3. Plastic bag
  4. Standard spare parts and installation materials
- Option**
1. Mast mounting kit
  2. Flush mount kit


Display Unit GP-39

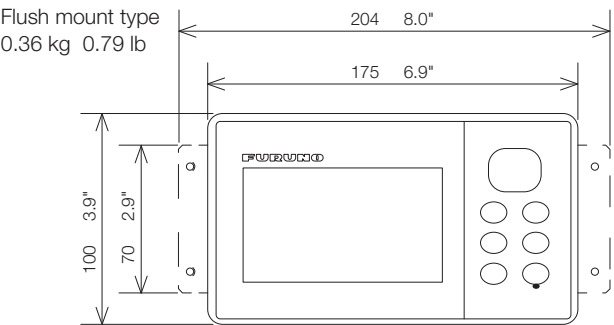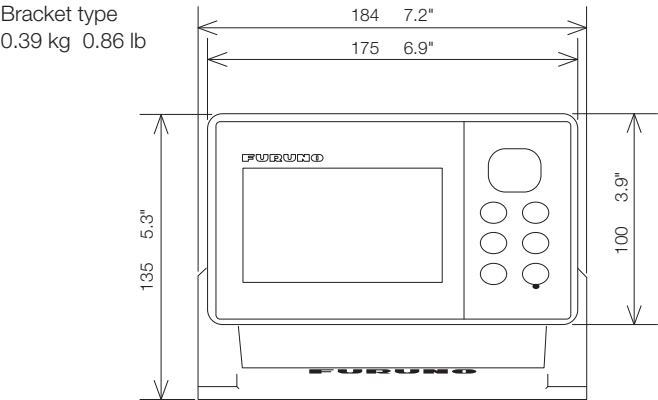

GPS Antenna

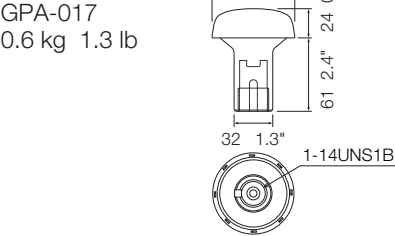

INTERCONNECTION DIAGRAM

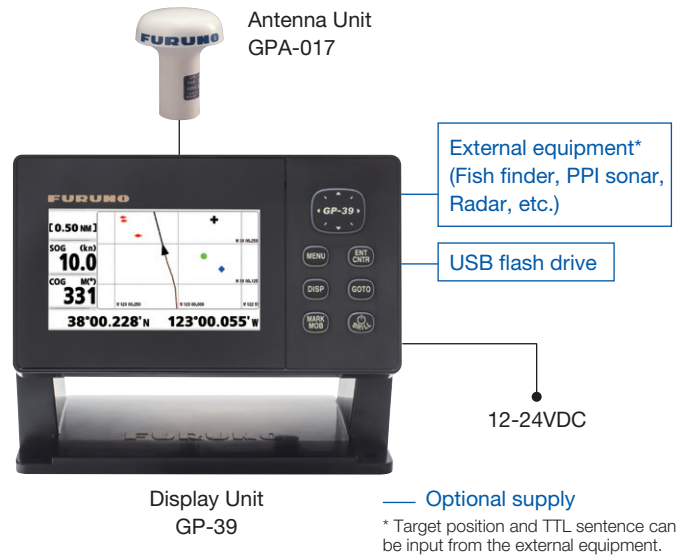

Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

**FURUNO ELECTRIC CO., LTD.**  
Nishinomiya, Hyogo, Japan  
www.furuno.com

**FURUNO U.S.A., INC.**  
Camas, Washington, U.S.A.  
www.furunousa.com

**FURUNO (UK) LIMITED**  
Havant, Hampshire, U.K.  
www.furuno.co.uk

**FURUNO FRANCE S.A.S.**  
Bordeaux-Mérignac, France  
www.furuno.fr

**FURUNO ITALIA S.R.L.**  
Gatteo Mare, Italy  
www.furuno.it

**FURUNO ESPAÑA S.A.**  
Madrid, Spain  
www.furuno.es

**FURUNO DANMARK A/S**  
Hvidovre, Denmark  
www.furuno.dk

**FURUNO NORGE A/S**  
Ålesund, Norway  
www.furuno.no

**FURUNO SVERIGE AB**  
Västra Frölunda, Sweden  
www.furuno.se

**FURUNO FINLAND OY**  
Espoo, Finland  
www.furuno.fi

**FURUNO POLSKA Sp. z o.o.**  
Gdynia, Poland  
www.furuno.pl

**FURUNO EURUS LLC**  
St. Petersburg, Russian Federation  
www.furuno.com.ru

**FURUNO SINGAPORE PTE LTD**  
Singapore  
www.rico.com.sg

**FURUNO DEUTSCHLAND GmbH**  
Rellingen, Germany  
www.furuno.de

**FURUNO HELLAS S.A.**  
Piraeus, Greece  
www.furuno.gr

**FURUNO (CYPRUS) LTD**  
Limassol, Cyprus  
www.furuno.com.cy

**FURUNO CHINA CO., LTD.**  
Hong Kong

**FURUNO SHANGHAI CO., LTD.**  
Shanghai, China  
www.furuno.com/cn

16053SK Printed in Japan  
Catalogue No. CACD34730AE

**FURUNO**

GPS NAVIGATOR

Model

**GP-39**



www.furuno.com



# Highly accurate position fixing GPS navigator with clear color LCD

The FURUNO GPS navigator GP-39 provides accurate and reliable position fixing, thanks to a 12-channel GPS receiver combined with integrated SBAS (WAAS/EGNOS/MSAS) technology.

The GP-39 has various display modes (Plotter, Highway, Steering, NAV data, Satellite monitor and 2 user-customizable modes) on the 4.2" color LCD. Up to 3,000 points of ship track, 10,000 waypoints and 100 routes (each with up to 30 waypoints) can be stored. The waypoint and route data can be exported/imported via a USB flash drive or signal converter.

The GP-39 can be networked with a fish finder, sonar, radar or other navigation equipment for feeding highly accurate navigation data.




- ▶ Newly designed GPS core delivers enhanced position fixing accuracy
- ▶ 4.2" high-resolution color LCD
- ▶ Storage for 3,000 track points, 10,000 waypoints and 100 routes
- ▶ SBAS capable for better positioning calculations\*

\* SBAS is a general term for a GPS navigation system with differential correction by means of geostationary satellites. In the US, it is called WAAS (Wide Area Augmentation System), whereas in Europe and Japan, it is called EGNOS (European Geostationary Navigation Overlay System) and MSAS (MSAT Satellite-based Augmentation System), respectively.

- ▶ Share and display position information on networked equipment such as a fish finder, sonar, radar, etc.
- ▶ 7 display modes available, including 2 user-customizable modes
- ▶ Waypoint and route data can be exported/imported via a USB flash drive or signal converter
- ▶ Multi-language ready : English, French, Spanish, Chinese, Vietnamese, Malay, Indonesian and Thai


## Various Displays

The GP-39 can display navigational data in a variety of formats, allowing you to select which data you want displayed.




### Plotter

The plotter display traces own ship's track and shows position on a 2D map. This mode presents various data and information with graphic symbols and icons.



### Highway

3D view of own ship's progress towards the destination (waypoint). This mode is best used for navigation where a straight-line course can be followed.




### NAV data

The NAV data display shows receiver status, position in latitude and longitude, speed over ground, course over ground, date and time.



### Steering

Steering information with a bearing scale is shown.




### Satellite Monitor

The satellite monitor display shows the condition of GPS and GEO (SBAS) satellites. Number, bearing and elevation angle of all GPS and GEO satellites (if applicable) in view are displayed.



### COG (selectable as a user display)

COG display shows course over ground in analog format and speed over ground in digital format.




### Digital (selectable as a user display)

The digital display shows one to four items of digital navigation data. You can select which data you want displayed from various sources, such as Position, COG, SOG, etc.

## Interconnection with fish finder/sonar/radar

The GP-39 delivers the position information to an interfaced fish finder or sonar. Also, the GP-39 receives the TLL (Target Latitude/Longitude) sentence from networked fish finders or sonars and can display the received information. This allows you to mark fish school locations easily.

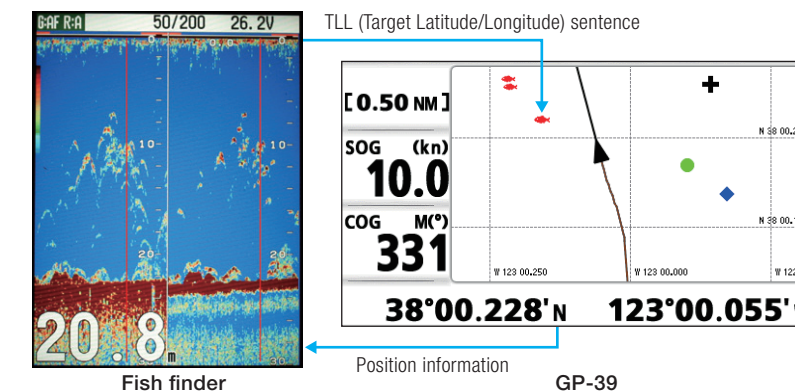

## Waypoint and route data transfer

Waypoint, route data and setting information can be exported/imported via a USB flash drive between GP-39 units. The waypoint and route data in GP-32 can be transferred to GP-39 by means of signal converter. You can backup information, or share useful information between vessels.



## Easy to mount on/off the bracket

The improved hanger allows the display unit to be mounted or un-mounted easily. The display unit can be carried in the bag (standard supply).

